_			
Daund	Aluminum	Diroct Dur	ial Dalac
ROHIG	АШИНИН		IAL POIES
IVOGIIG	/ \ M M	DII CCC DGI	Idi I Olos

3 Inch Diameter					4 Inch Diameter						
Pole Wind Rating (EPA) with 1.3 Gust Factor											
Height	70 mph	80 mph	90 mph	100 mph	Wt (Lbs)	Height	70 mph	80 mph	90 mph	100 mph	Wt (Lbs)
7'	6.5	4.5	3.2	2	17	8'	6.3	4.5	3	2	14
10'	5.6	3.9	2.7	1.7	21	10'	5	3.6	2.4	1.7	16
12'	4.7	3.3	2.2	1.4	24	12'	4.2	3	2	1.3	19
14'	3.7	2.6	1.8	1.1	28	14'	3.4	2.4	1.6	1	21

Available Lengths

7, 10, 12, 14 Feet 8, 10, 12, 14 Feet


Wall Thickness


0.083 0.125

Available in Colors = Black, White, Bronze.

Type of Paint = Powder Coating

Type of Faint - Fowder Coating.				
Pole Top	Open top is standard.			
Pole Shaft	Seamlessly extruded from 6063-T3 Alloy.			
Maximum Load	Designed to support a single light with maximum weight of 30 pounds.			
Warranty	10 years in non-coastal environment.			
Use	To be used only as a light pole with a single light fixture on top.			

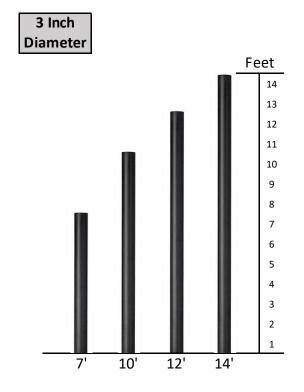

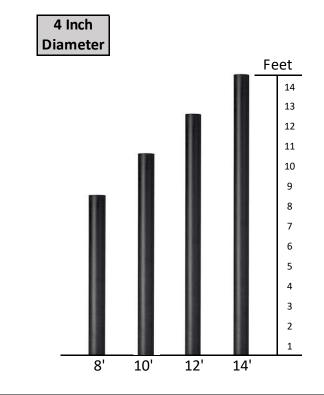

Other lengths and colors available upon request

Copyright 2024 Illumacorp LLC, All rights reserved.

Sales@Florida-Aluminum-Poles.com

